


Terminal strip KL06

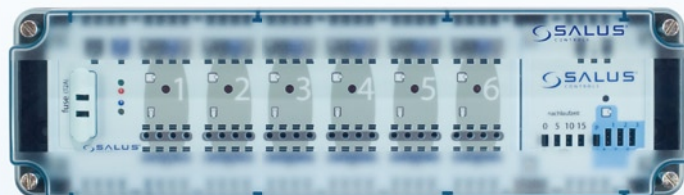

- Available in 230V AC or 24V DC
- Cable connection without tools by plug-in system
- Up to 6 thermostats and 24 drive units connectable
- Clear and unmistakable marking of the terminals
- Easy strain relief integration
- Control of the functions by LED's
- Space for marking for simple recognition
- Suitable for DIN Rail rails or wall attachment
- Up-gradeable with pump logic module
- Suitable for heating and cooling operation
- Integrated overload protection

The SALUS regulator terminal strip KL06 provides the ideal connection between room thermostats and control drive units. SALUS room thermostats and SALUS control drive units can be connected in the easiest and safest possible way without the use of tools.

Integrated LEDs keep you informed at all times about the current operating status. The built-in fuse protects the SALUS regulator terminal strip from excessive voltage and can be removed and replaced easily in case of need.

A text box enables you to visualise a simple and clear diagram of the allocation of the circuits.

Depending on the signal received from the room thermostat, the regulator terminal strip can be actuated for the heating or cooling mode of operation, respectively.

A sensible upgrade is obtained by fitting the pump logic module PL 06. The potential free relay switches the pump individually according to your settings.

Technical data	230 V	24 V
Article no.:	132.100	132.120
Operating voltage:	230 V AC	230 V AC/24 V DC
Circuit voltage:	230 V AC, 5 A	24 V DC, 5 A
Dimensions H/W/L in mm:	64 x 86.5 x 304	
Safety fuse:	T4 A H	
Max. number of thermostats:	6	
Max. number control drive units:	24	
Weight (without transformer):	210 g	
Permissible cable diameters		
Flexible cable:	1.0 - 1.5 qmm	
Solid cable:	0.5 - 1.5 qmm	
Ambient temperature:	0°C - 50°C	
Storage temperature:	-25°C - 60°C	
Relative air humidity:	max 95% non-condensing	
Type of safety cut-out:	II	
Protection rating:	IP 20	
CE registration		

SALUS Controls GmbH
 Dieselstr. 34
 D-63165 Mühlheim am Main
 Tel.: +49.(0)6108.825 85-0
 Fax: +49.(0)6108.825 85-29
 Mail: info@salus-controls.de
 Web: www.salus-controls.de